


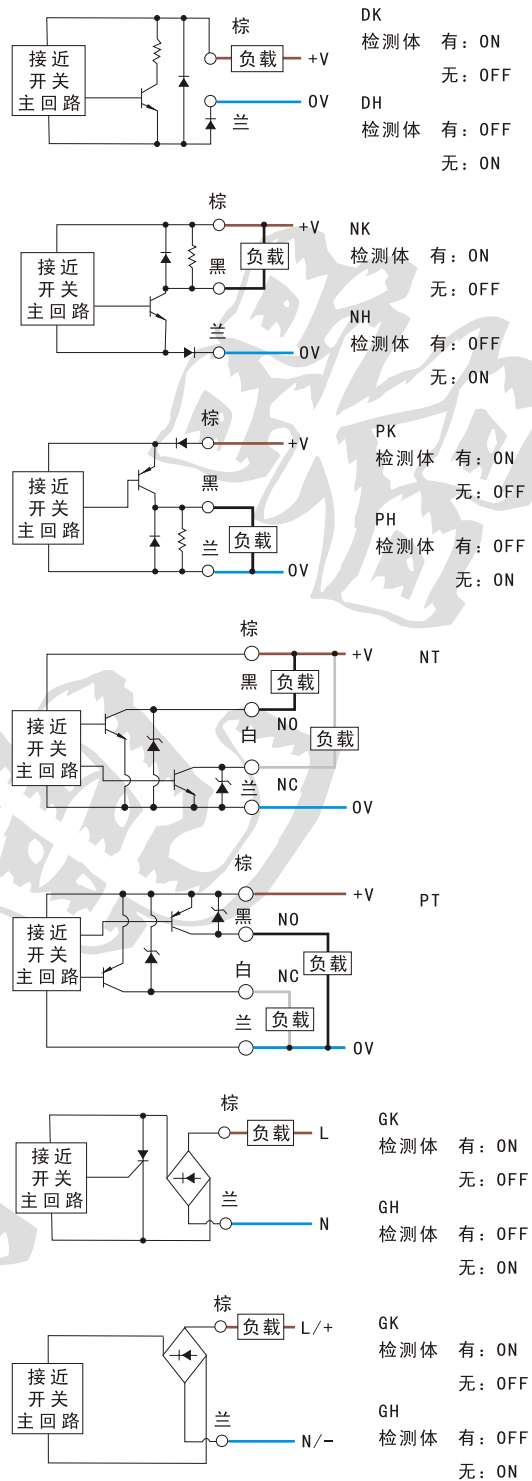


额定感应距离/ 实际工作距离		埋入式
		非埋入式
单位:mm		

10mm/8mm
15mm/12mm

K30 □30×53

10...30VDC
50mA/200mA
100Hz/200Hz
6V/1.5V
<0.4mA/0.05mA
LJK30M-3010PK
LJK30M-3010PH
LJK30M-3010PT
LJK30M-3010NK
LJK30M-3010NH
LJK30M-3010NT
LJK30M-3010DK
LJK30M-3010DH
LJK30-3015PK
LJK30-3015PH
LJK30-3015PT
LJK30-3015NK
LJK30-3015NH
LJK30-3015NT
LJK30-3015DK
LJK30-3015DH
90...250VAC
300mA
25Hz
<6.5V
≤1.6mA
LJK30M-2410GK
LJK30M-2410GH
LJK30M-4010GK
LJK30M-4010GH
LJK30-2415GK
LJK30-2415GH
LJK30-4015GK
LJK30-4015GH
检测距离(Sn)的5%
约为回差(H)的10%
-
-
Yes
-25℃...70℃
60×60×1t
ABS工程塑料
IP66



对波浪的防护



对任何方向的水直
接强喷水流也不受
水浸。

IP66